



Toolholders for inserts TNGA, TNMA, TNMG and TNMM



- For inserts programme, see page(s) 436-440, 469
- GAMO° = Rake angle, LAMS° = Inclination angle
- For holder code key, see page(s) 17-18

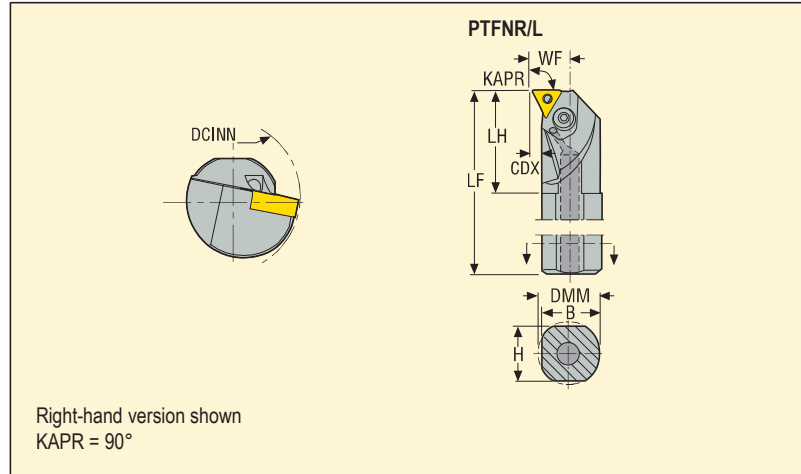

	Designation	Dimensions in mm								GAMO°	LAMS°		
		DMM	H	B	LF	WF	LH	CDX	DCINN				
16	A32T-PTFNR16	32	30	31,0	300	22	50	3,5	40	-6	-10	1,6	TN..1604..
	A40U-PTFNR16	40	37	38,5	350	27	60	5,0	50	-6	-10	2,9	TN..1604..
	A32T-PTFNL16	32	30	31,0	300	22	50	3,5	40	-6	-10	1,6	TN..1604..
	A40U-PTFNL16	40	37	38,5	350	27	60	5,0	50	-6	-10	2,9	TN..1604..
22	A40U-PTFNR22	40	37	38,5	350	27	60	5,0	50	-6	-10	2,9	TN..2204..
	A50V-PTFNR22	50	47	48,5	400	35	70	7,0	63	-6	-8	5,3	TN..2204..
	A40U-PTFNL22	40	37	38,5	350	27	60	5,0	50	-6	-10	2,9	TN..2204..
	A50V-PTFNL22	50	47	48,5	400	35	70	7,0	63	-6	-8	5,3	TN..2204..

Spare Parts, Parts included in delivery

For size	Insert shim	Locking screw	Shim pin	Wedge/locking key	Wedge clamp	Wedge key	Wedge screw	Coolant adapter	Punch	Shim key
A32T-...R16	136.26-621	136.26-651	136.26-650	3SMS795	110.26-640.1	–	117.26-655.1	SEAL32	117.26-686	–
A40U-...R16	136.26-621	136.26-651	136.26-650	3SMS795	110.26-640.1	–	117.26-655.1	SEAL40	117.26-686	–
A32T-...L16	136.26-621	136.26-651	136.26-650	3SMS795	110.26-641.1	–	117.26-655.1	SEAL32	117.26-686	–
A40U-...L16	136.26-621	136.26-651	136.26-650	3SMS795	110.26-641.1	–	117.26-655.1	SEAL40	117.26-686	–
A40U-...R22	136.26-624	136.26-651	136.26-652	–	110.26-642.1	4SMS795	170.26-655	SEAL40	117.26-687	3SMS795
A50V-...R22	136.26-624	136.26-651	136.26-652	–	110.26-642.1	4SMS795	170.26-655	SEAL50	117.26-687	3SMS795
A40U-...L22	136.26-624	136.26-651	136.26-652	–	110.26-643.1	4SMS795	170.26-655	SEAL40	117.26-687	3SMS795
A50V-...L22	136.26-624	136.26-651	136.26-652	–	110.26-643.1	4SMS795	170.26-655	SEAL50	117.26-687	3SMS795

Please check availability in current price and stock-list

* To be ordered separately