


Inserts – Parting-off, 150.10...-12 and 150.10...-14

Tolerances:
 CW = ±0,05
 CW = ±0,08

Size:
 1.4-2.5
 3-6

Toolholder range, see page(s)
 708-710

Size	Dimensions in mm	
	CW	INSL
1.4	1,40	9,0
2.0	2,00	9,0
2.25	2,25	9,0
2.5	2,50	9,0
3	3,10	9,0
4	4,10	9,0
5	5,10	9,0
6	6,35	9,0

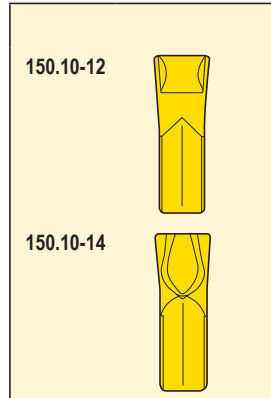

Inserts	Designation	RE	PSIRR°	PSIRL°	Grades															
					Coated						Uncoated									
					T25M	T350M	CP500	CP600	TGP35	TGP45	HX									
150.10-12	150.10-2.5N-12	0,17	-	-	■	■	■	■	■	■										
	150.10-2.5R6-12	0,17	6	-	■			■												
	150.10-2.5L6-12	0,17	-	6	■			■												
	150.10-3N-12	0,19	-	-	■	■	■	■	■	■										
	150.10-3R6-12	0,19	6	-	■			■												
	150.10-3L6-12	0,19	-	6	■			■												
	150.10-4N-12	0,23	-	-	■	■	■	■	■	■										
	150.10-4R6-12	0,23	6	-	■			■												
	150.10-4L6-12	0,23	-	6	■			■												
	150.10-5N-12	0,26	-	-	■					■										
150.10-6N-12	0,30	-	-	■					■											
150.10-14	150.10-1.4N-14	0,15	-	-				■	■					■						
	150.10-2.0N-14	0,15	-	-		■	■	■		■			■							
	150.10-2.25N-14	0,15	-	-		■	■	■		■			■							
	150.10-2.5N-14	0,17	-	-	■	■	■	■		■			■							
	150.10-2.5R6-14	0,17	6	-	■			■		■										
	150.10-2.5L6-14	0,17	-	6	■			■												
	150.10-3N-14	0,19	-	-	■	■	■	■	■	■			■							
	150.10-3R6-14	0,19	6	-	■			■	■	■										
	150.10-3L6-14	0,19	-	6	■			■		■										
	150.10-4N-14	0,23	-	-	■	■	■	■	■	■			■							
	150.10-4R6-14	0,23	6	-	■			■												
	150.10-4L6-14	0,23	-	6	■			■												
	150.10-5N-14	0,26	-	-	■			■	■											
	150.10-6N-14	0,30	-	-	■			■	■											

■ Stock standard
 Subject to change refer to current price- and stock-list


Inserts – Parting-off, 150.10...-16

Tolerances:
 CW = ±0,05
 CW = ±0,08

Size:
 1.4-2.5
 3-6

Toolholder range, see page(s)
 708-710

Size	Dimensions in mm	
	CW	INSL
1.4	1,40	9,0
2.0	2,00	9,0
2.25	2,25	9,0
2.5	2,50	9,0
3	3,10	9,0
4	4,10	9,0
5	5,10	9,0
6	6,35	9,0



Inserts	Designation	RE	PSIRR°	PSIRL°	Grades														
					Coated						Uncoated								
					T25M	T350M	CP500	CP600	TGP35	TGP45	HX								
150.10-16	150.10-1.4N-16	0,15	-	-			■	■		■									
	150.10-2.0N-16	0,15	-	-		■	■	■		■									
	150.10-2.25N-16	0,15	-	-	■	■	■	■		■		■							
	150.10-2.5L6-16	0,17	-	6	■			■											
	150.10-2.5N-16	0,17	-	-	■	■	■	■		■		■							
	150.10-2.5R6-16	0,17	6	-	■			■		■		■							
	150.10-3L6-16	0,19	-	6	■			■		■									
	150.10-3N-16	0,19	-	-	■	■	■	■	■	■		■							
	150.10-3R6-16	0,19	6	-	■			■	■	■									
	150.10-4L6-16	0,23	-	6	■														
	150.10-4N-16	0,23	-	-	■	■	■	■	■	■		■							
	150.10-4R6-16	0,23	6	-	■							■							
	150.10-5L6-16	0,26	-	6	■														
	150.10-5N-16	0,26	-	-	■		■	■	■	■		■							
	150.10-5R6-16	0,26	6	-	■														
	150.10-6N-16	0,30	-	-	■		■	■	■	■		■							

■ Stock standard
 Subject to change refer to current price- and stock-list