


-
- HSS-blade**
- Technical drawing of an HSS blade showing top and side views with dimensions:
- Top View:**
 - LH:** Length of the handle.
 - OAL:** Overall length of the blade.
 - 150.10A-20/25:** Blade specification.
 - CUTDIA:** Circular cutting diameter, indicated by a circle and arrow.
 - Side View:**
 - CW:** Width of the handle.
 - HF:** Height of the handle.
 - OAW:** Overall width of the blade.
 - L150.10A-25:** Blade specification.


[illegible]

710

Inserts – Parting-off, 150.10...-12 and 150.10...-14

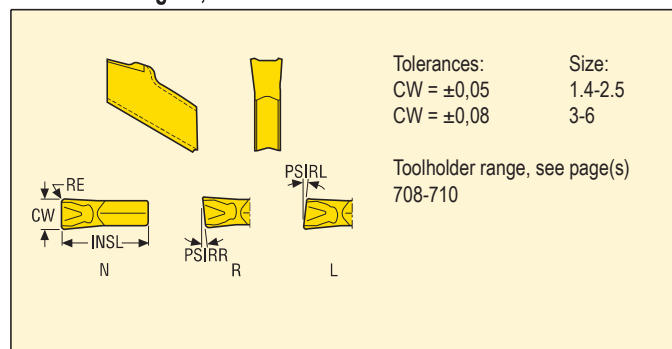


Size	Dimensions in mm	
	CW	INSL
1.4	1,40	9,0
2.0	2,00	9,0
2.25	2,25	9,0
2.5	2,50	9,0
3	3,10	9,0
4	4,10	9,0
5	5,10	9,0
6	6,35	9,0

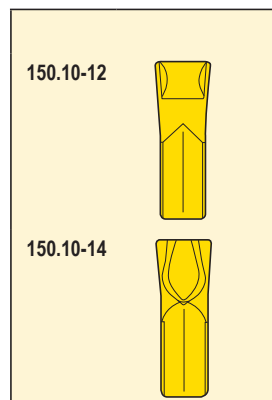


Inserts	Designation	RE	PSIRR°	PSIRL°	Grades									
					Coated						Uncoated			
					T25M	T350M	CP500	CP600	TGP35	TGP45	HX			
150.10-12	150.10-2.5N-12	0,17	–	–	■	■	■	■	■	■				
	150.10-2.5R6-12	0,17	6	–	■			■						
	150.10-2.5L6-12	0,17	–	6	■			■						
	150.10-3N-12	0,19	–	–	■	■	■	■	■	■				
	150.10-3R6-12	0,19	6	–	■			■						
	150.10-3L6-12	0,19	–	6	■			■						
	150.10-4N-12	0,23	–	–	■	■	■	■	■	■				
	150.10-4R6-12	0,23	6	–	■									
	150.10-4L6-12	0,23	–	6	■									
	150.10-5N-12	0,26	–	–	■				■					
	150.10-6N-12	0,30	–	–	■				■					
150.10-14	150.10-1.4N-14	0,15	–	–			■	■			■			
	150.10-2.0N-14	0,15	–	–		■	■	■		■	■			
	150.10-2.25N-14	0,15	–	–		■	■	■		■	■			
	150.10-2.5N-14	0,17	–	–	■	■	■	■		■	■			
	150.10-2.5R6-14	0,17	6	–	■			■		■				
	150.10-2.5L6-14	0,17	–	6	■			■						
	150.10-3N-14	0,19	–	–	■	■	■	■	■	■	■			
	150.10-3R6-14	0,19	6	–	■			■		■				
	150.10-3L6-14	0,19	–	6	■			■		■				
	150.10-4N-14	0,23	–	–	■	■	■	■	■	■	■			
	150.10-4R6-14	0,23	6	–	■									
	150.10-4L6-14	0,23	–	6	■									
	150.10-5N-14	0,26	–	–	■		■	■						
	150.10-6N-14	0,30	–	–	■		■	■						

■ Stock standard
 Subject to change refer to current price- and stock-list

Inserts – Parting-off, 150.10...-16

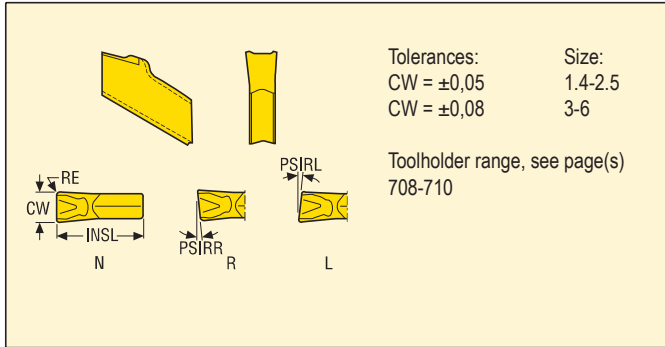

Size	Dimensions in mm	
	CW	INSL
1.4	1,40	9,0
2.0	2,00	9,0
2.25	2,25	9,0
2.5	2,50	9,0
3	3,10	9,0
4	4,10	9,0
5	5,10	9,0
6	6,35	9,0



Inserts	Designation	RE	PSIRR°	PSIRL°	Grades									
					Coated						Uncoated			
					T25M	T350M	CP500	CP600	TGP35	TGP45	HX			
150.10-16	150.10-1.4N-16	0,15	–	–			■	■		■				
	150.10-2.0N-16	0,15	–	–		■	■	■		■				
	150.10-2.25N-16	0,15	–	–	■	■	■	■		■	■			
	150.10-2.5L6-16	0,17	–	6	■			■						
	150.10-2.5N-16	0,17	–	–	■	■	■	■		■	■			
	150.10-2.5R6-16	0,17	6	–	■			■		■	■			
	150.10-3L6-16	0,19	–	6	■			■		■				
	150.10-3N-16	0,19	–	–	■	■	■	■	■	■	■			
	150.10-3R6-16	0,19	6	–	■			■	■	■				
	150.10-4L6-16	0,23	–	6	■									
	150.10-4N-16	0,23	–	–	■	■	■	■	■	■	■			
	150.10-4R6-16	0,23	6	–	■					■	■			
	150.10-5L6-16	0,26	–	6	■									
	150.10-5N-16	0,26	–	–	■		■	■	■	■	■			
	150.10-5R6-16	0,26	6	–	■									
	150.10-6N-16	0,30	–	–	■		■	■	■	■	■			

■ Stock standard
Subject to change refer to current price- and stock-list