


OUTSIDE MICROMETER WITH INTERCHANGEABLE ANVILS




3206-150A

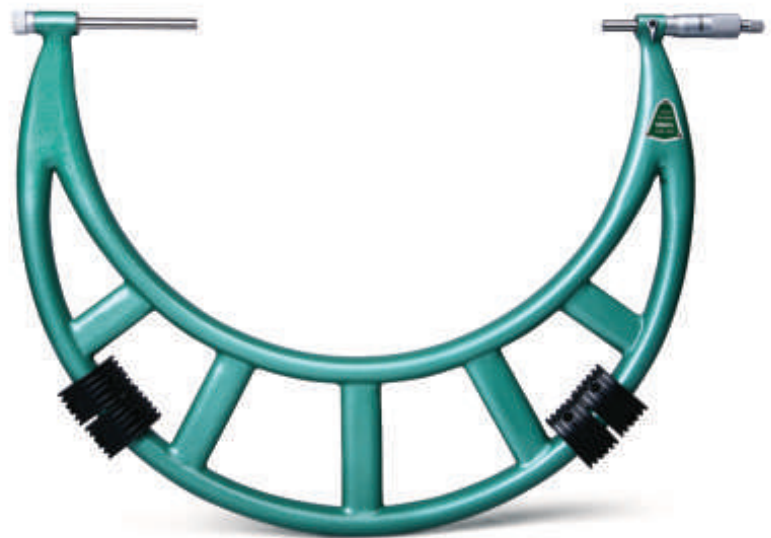


3206-400

Unit: mm

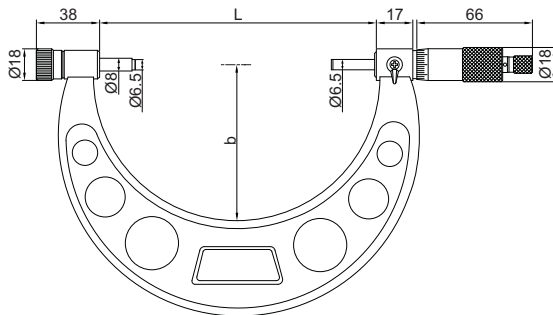

type A

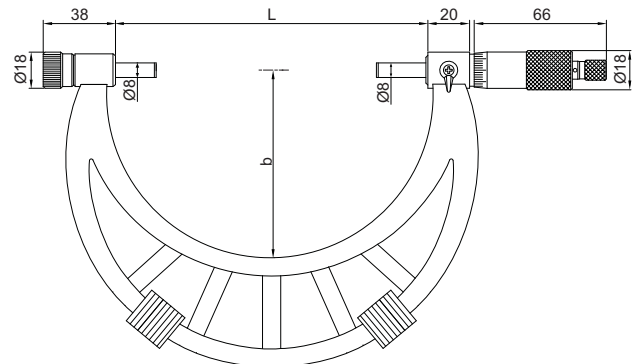

type B

(mm)

Code	Range	Type	Accuracy	L	b
3206-50A	0-50mm	A	4μm	58	35
3206-100A	0-100mm	A	5μm	108	57
3206-150A	0-150mm	A	6μm	158	82
3206-151A	50-150mm	A	6μm	158	82
3206-200A	100-200mm	A	7μm	208	114
3206-300A	150-300mm	A	9μm	308	165
3206-301A	200-300mm	A	9μm	308	165
3206-400	300-400mm	B	11μm	409	224
3206-500	400-500mm	B	13μm	509	275
3206-600	500-600mm	B	14μm	609	321
3206-700	600-700mm	B	16μm	709	371
3206-800	700-800mm	B	18μm	809	426
3206-900	800-900mm	B	20μm	909	476
3206-1000	900-1000mm	B	22μm	1009	576



- Graduation 0.01mm
- Ratchet stop
- Carbide measuring faces
- Supplied with setting standards