


Thread turning – Inserts

Whitworth, BSW – External Threading

Snap-Tap®

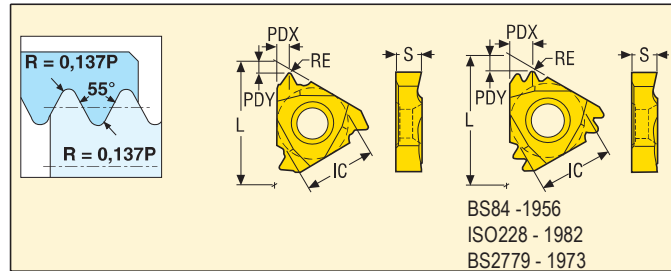

Size	Dimensions in mm		
	IC	L	S
16	9,525	16,5	3,47
22	12,7	22,0	4,71



Pitch		Dimensions in mm			Insert Part No. Right	Grades					Insert Part No. Left	Grades					
mm	TPI	PDY	PDX	RE		Coated		Uncoated				Coated		Uncoated			
						CP200	CP300	CP500	H15				CP200	CP300	CP500	H15	
–	28	0,8	0,8	0,09	16ER28W			■	■				■				
–	20	0,8	0,8	0,14	16ER20W			■	■				■				
–	19	0,8	0,8	0,15	16ER19W	■		■	■				■				
–	18	0,8	0,8	0,16	16ER18W			■					■				
–	16	0,8	0,8	0,2	16ER16W			■	■				■				
–	14	1,2	1,5	0,24	16ER14W	■		■	■				■				
–	12	1,2	1,5	0,24	16ER12W			■	■				■				
–	11	1,2	1,5	0,3	16ER11W	■		■	■				■				
–	10	1,2	1,5	0,27	16ER10W			■	■				■				
–	9	1,2	1,5	0,31	16ER9W			■					■				
–	8	1,2	1,5	0,42	16ER8W			■	■				■				
–	7	1,8	2,5	0,43	22ER7W			■	■				■				
–	6	1,8	2,5	0,5	22ER6W			■	■				■				
–	5	1,7	2,5	0,63	22ER5W			■	■				■				
–	19	0,8	0,8	0,16	16ER19W-A				■								
–	14	1,2	1,5	0,24	16ER14W-A				■								
–	11	1,2	1,5	0,3	16ER11W-A				■								
–	19	0,8	0,8	0,16	16ER19W-A1				■								
–	14	1,2	1,5	0,24	16ER14W-A1				■								
–	11	1,2	1,5	0,3	16ER11W-A1				■								
–	19	0,8	0,8	0,16	16ER19W-A2				■								
–	14	1,2	1,5	0,24	16ER14W-A2				■								
–	11	1,2	1,5	0,3	16ER11W-A2				■								
–	14	1,5	2,2	0,24	16ER14W-TT				■								
–	11	1,8	2,8	0,3	16ER11W-TT				■								
–	11	2,3	3,5	0,3	22ER11W2M				■								

■ Stock standard
 Subject to change refer to current price- and stock-list