



# Thread turning – Inserts

## Partial Profile 55° – Internal Threading

Snap-Tap®

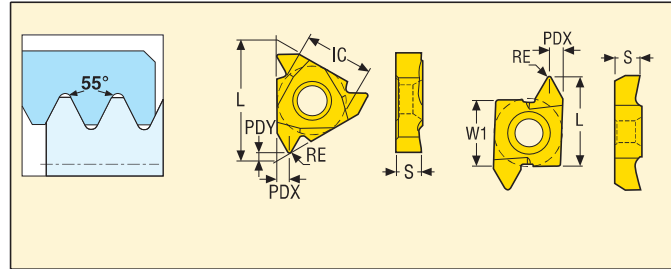

Size	Dimensions in mm			
	IC	W1	L	S
09	5,56	-	9,6	2,4
11	6,35	-	11,0	3,0
16	9,525	-	16,5	3,47
22	12,7	-	22,0	4,71
26	-	15,875	26,0	7,88




Pitch		Dimensions in mm			Insert Part No. Right	Grades					Insert Part No. Left	Grades				
mm	TPI	PDY	PDX	RE		Coated		Uncoated				Coated		Uncoated		
						CP200	CP300	CP500	H15	CP200		CP300	CP500	H15		
0,5-1,5	48,0-16,0	0,7	0,8	0,08	09NRA55			■								
0,5-1,5	48,0-16,0	0,6	0,8	0,08	11NRA55			■	■				■			
0,5-1,5	48,0-16,0	0,6	0,8	0,08	16NRA55			■	■				■			
0,5-3,0	48,0-8,0	1,1	1,5	0,08	16NRAG55	■		■	■				■			
1,75-3,0	14,0-8,0	1,1	1,5	0,2	16NRG55	■		■	■				■			
3,5-5,0	7,0-5,0	1,8	2,5	0,4	22NRN55			■	■				■			
0,5-3,0	48,0-8,0	1,1	1,5	0,08	16NRAG55-A			■								
1,75-3,0	14,0-8,0	1,1	1,5	0,2	16NRG55-A			■								
0,5-3,0	48,0-8,0	1,1	1,5	0,08	16NRAG55-A1			■								
1,75-3,0	14,0-8,0	1,1	1,5	0,2	16NRG55-A1			■								
0,5-3,0	48,0-8,0	1,1	1,5	0,08	16NRAG55-A2			■								
1,75-3,0	14,0-8,0	1,1	1,5	0,2	16NRG55-A2			■								
5,5-10,0	4,5-2,5	-	5,0	0,7	26NRK55			■					■	■		

■ Stock standard


Subject to change refer to current price- and stock-list

## Partial Profile 60° – Internal Threading

Snap-Tap®

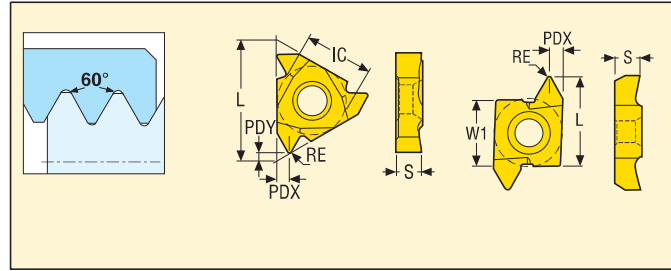

Size	Dimensions in mm			
	IC	W1	L	S
09	5,56	–	9,6	2,4
11	6,35	–	11,0	3,0
16	9,525	–	16,5	3,47
22	12,7	–	22,0	4,71
26	–	15,875	26,0	7,88

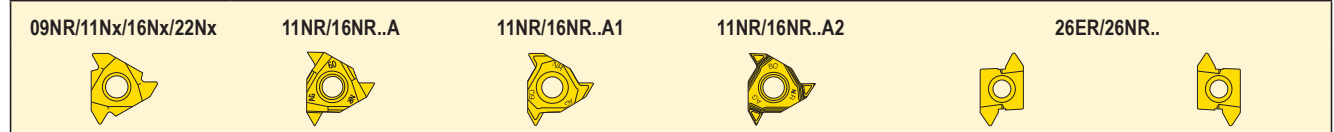

Pitch		Dimensions in mm			Insert Part No. Right	Grades					Insert Part No. Left	Grades						
mm	TPI	PDY	PDX	RE		Coated		Uncoated				Coated		Uncoated				
						CP200	CP300	CP500	H15				CP200	CP300	CP500	H15		
0,5-1,5	48,0-16,0	0,7	0,8	0,08	09NRA60			■										
0,5-1,5	48,0-16,0	0,7	0,8	0,08	11NRA60	■		■	■						■			
0,5-1,5	48,0-16,0	0,7	0,8	0,08	16NRA60			■	■						■			
0,5-3,0	48,0-8,0	1,1	1,5	0,08	16NRAG60	■		■	■						■			
1,75-3,0	14,0-8,0	1,1	1,5	0,12	16NRG60	■		■	■						■			
3,5-5,0	7,0-5,0	1,8	2,5	0,25	22NRN60	■	■	■	■						■			
0,5-1,5	48,0-16,0	0,7	0,8	0,08	11NRA60-A			■										
0,5-3,0	48,0-8,0	1,1	1,5	0,08	16NRAG60-A			■										
1,75-3,0	14,0-8,0	1,2	1,5	0,12	16NRG60-A			■										
0,5-1,5	48,0-16,0	0,7	0,8	0,08	11NRA60-A1			■										
0,5-3,0	48,0-8,0	1,1	1,5	0,08	16NRAG60-A1			■										
1,75-3,0	14,0-8,0	1,2	1,5	0,12	16NRG60-A1			■										
0,5-1,5	48,0-16,0	0,7	0,8	0,08	11NRA60-A2			■										
0,5-3,0	48,0-8,0	1,1	1,5	0,08	16NRAG60-A2			■										
1,75-3,0	14,0-8,0	1,2	1,5	0,12	16NRG60-A2			■										
5,5-10,0	4,5-2,5	–	5,0	0,4	26NRK60		■	■							26ERK60	■	■	

■ Stock standard  
Subject to change refer to current price- and stock-list